

# Overhead sectional door

## ASSA ABLOY OH1082P

**ASSA ABLOY**

ASSA ABLOY Entrance Systems

The global leader in  
door opening solutions



### Highly insulated and energy efficient

#### Temperature control

Built with 82 mm of insulation the new ASSA ABLOY OH1082P is designed to give you excellent thermal separation and great energy savings. And with innovative features, such as tight top and side seals and a waterresistant bottom seal you can be confident that you will minimize drafts and condensation in your workplace. This overhead sectional door gives you control over your indoor environment so you can create optimum working conditions.

#### Regulation ready

Constructed to meet the highest environmental regulations, the engineering and features of the ASSA ABLOY OH1082P future-proof it against the tough insulation requirements that are due to be introduced in 2020. The ASSA ABLOY OH1082P will meet, and exceed these requirements with a U-value of 0.46 W/m<sup>2</sup>K. \*

#### Mix-n-match

The ASSA ABLOY OH1082P has the same high quality design options as the ASSA ABLOY OH1042P and the ASSA ABLOY OH1042S, so if you have more than one overhead door you can configure them to create a uniform façade.

#### Your configurations

The new ASSA ABLOY OH1082P can be configured to your precise specifications. You can choose to have windows, pick from eleven standard colors or request your own factory painted color and there are a wide range of track sets and dimensions so you can tailor the ASSA ABLOY OH1082P to suit your entrance needs.

### Technical Data


Standard size up to (W x H) <sup>1</sup>	8000 x 6000 mm
Panel thickness	82 mm
Windows	optional
Pass-door	not possible
Access and Automation	optional
Wind load, EN 12424 <sup>2</sup>	class 3
Thermal transmittance, EN 12428 <sup>3</sup>	
Full panel steel door	0.46 W/(m <sup>2</sup> K)
Water penetration, EN 12425 <sup>4</sup>	class 3
Air permeability, EN 12426 <sup>4</sup>	class 3

1) Other sizes on request, size limited by doorweight

2) Higher wind loadclassification on request

3) Door size 5000 x 5000 mm


## Dimensional specifications

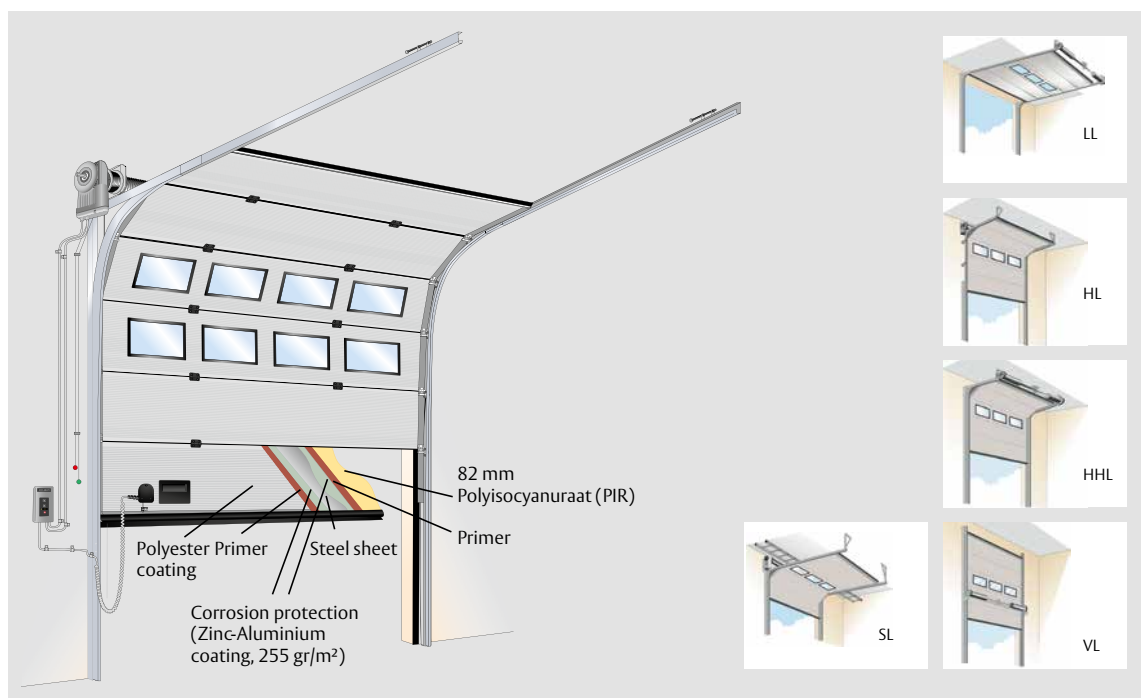

## Panel options



## Options access and automation

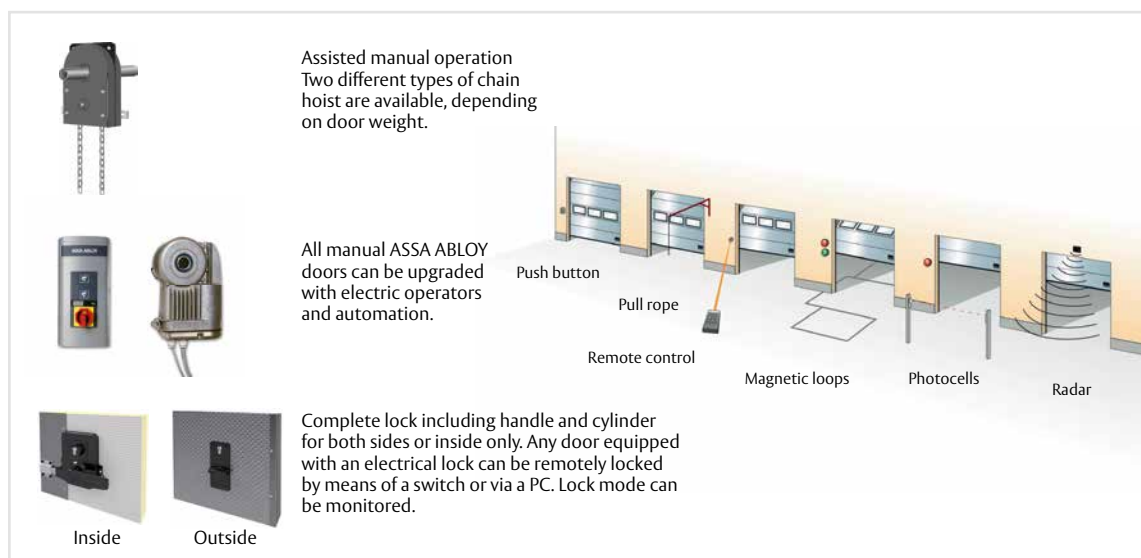

## Standard available outside colours

