

Hydraulic Scissor Lift

maxiflex®



Specifications

Load capacity:	2 Ton
Speed:	35 - 40 seconds to open position
Speed down:	Variable
Cylinders:	Single-acting with safety burst valves
Deck type:	Vastrap
Deck width:	1800mm
Deck length:	2800mm
Closed height:	475mm (L/H)
Vertical travel:	1600mm (V/T)
Overall height:	2075mm (O/H)
Lip type A:	Hydraulic one cylinder
Lip type B:	Manual split hinged with chains
Pit frame:	Yes - 80 x 80 x 6mm angle pit frame
Electrics:	380V - 3 phase
Controls:	Push-button (on handrail or wall)


Features

- Hydraulic lip
- Trip bars
- Safety struts
- Includes load test certificate
- Two coat paint system
(Primer & final)




Pit arrangements

Open apron ground level pit installation

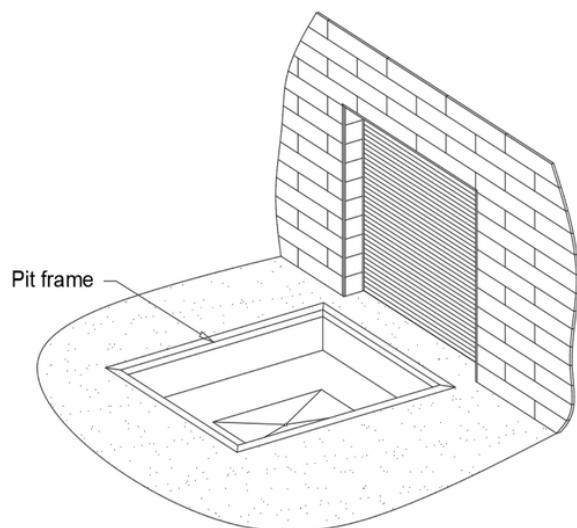

Lift table front pit installation with lip recess optional

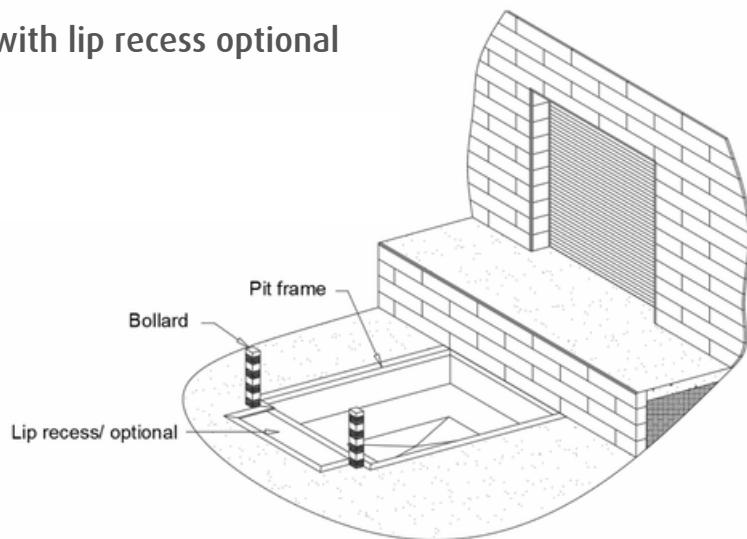

Lift table in pit installation with lip recess optional

